

LUNA

NIGHT LIGHT CAMERA



MANUAL


IN THE BOX



A



B




E



C




D



F

- A. 1x Night Light Camera
- B. 1x USB cable
- C. 1X Driver CD
- D. 1x This manual
- E. 1x Micro USB adapter
- F. 1X USB AC Wall Charger

DIAGRAM

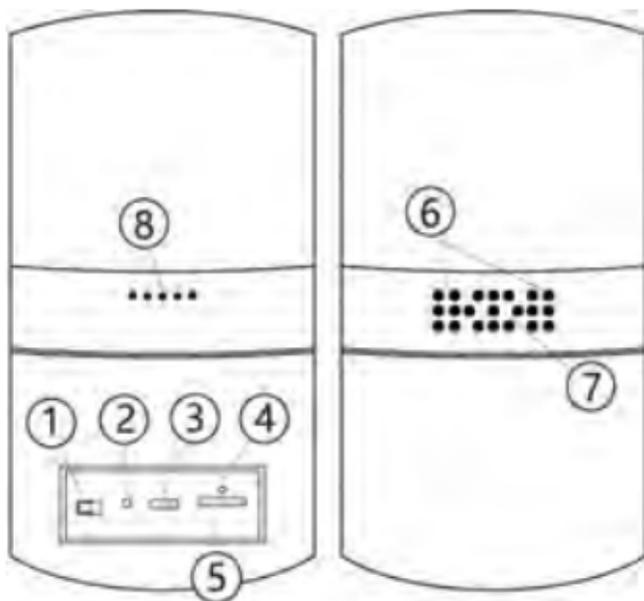

❶ WiFi Camera ON/OFF

❷ Reset pinhole

❸ USB Interface

❹ Wifi Indicator Light

❺ MicroSD Card slot

❻ Hidden IR LEDs

❼ Camera

❽ Speaker

GETTING STARTED

1 Download and install APP

Search and download free APP named “HDSmartIPC” in Apple APP store, Google play or Electronic market, and install it.



HDSmartIPC

2 Power up the LUNA


Connect one end of the USB cord (**B**) to the USB port on the LUNA **3** and the other end to the USB AC Wall Charger (**F**).

3 Turn on the LUNA's WiFi



Flip the WiFi switch **1** on the back of the LUNA to the ON position. Wait about 1 minute for the device to start up. When ready the Wifi indicator light **4** will flash red/blue.

MOBILE APP SETUP


1. Open smartphone settings, search and connect the device's wireless signal named "AI/LM.....", wait Wi-Fi connected, and phone status bar appear Wi-Fi  symbol.

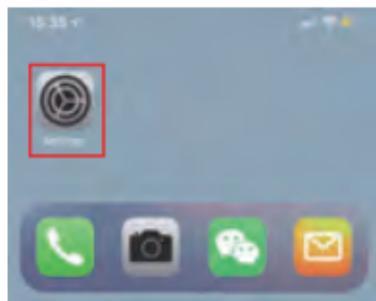


2. Enter APP, app will add just connected camera automatically, Camera Online then;

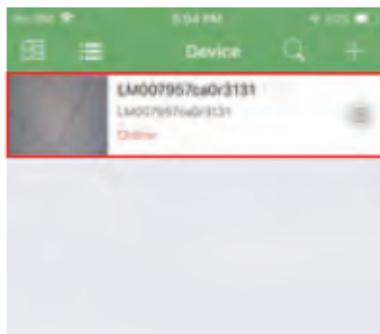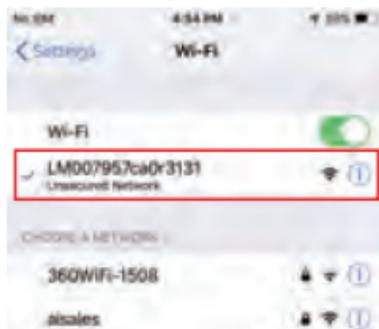

3. Press the gear icon  after the camera and select Device settings ,select Wi-Fi Config.

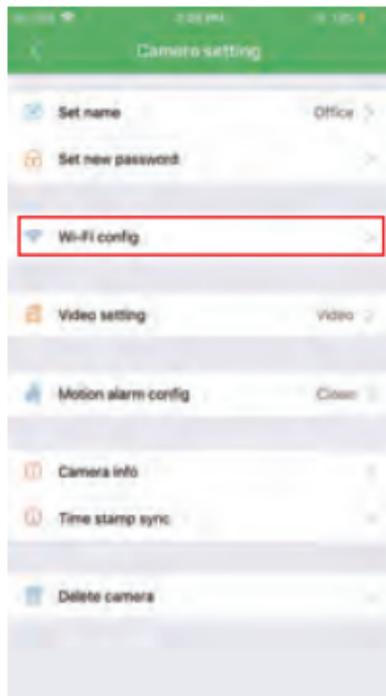



4. Select the router Wi-Fi and input password, camera will be connected to the router Wi-Fi. The smartphone will disconnect the signal from device and connect to the router Wi-Fi.
5. Quit APP, and device restart automatically and ready again in 30 seconds.
6. Enter APP and check live video locally or remotely anywhere.

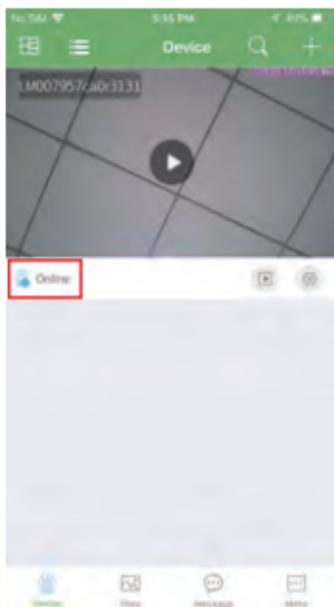

ACCESS SETTINGS

Set name: Press the settings icon  near the camera view and select Device settings, select Set name, insert name like Office,Room...

Set new password: Tap the settings icon  near the camera view and select Device settings,select Set new password and change it to new one. Default one is 8888.

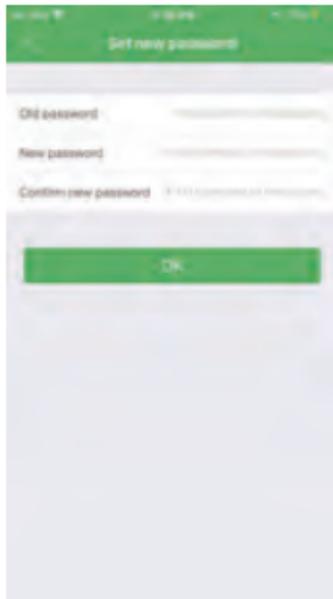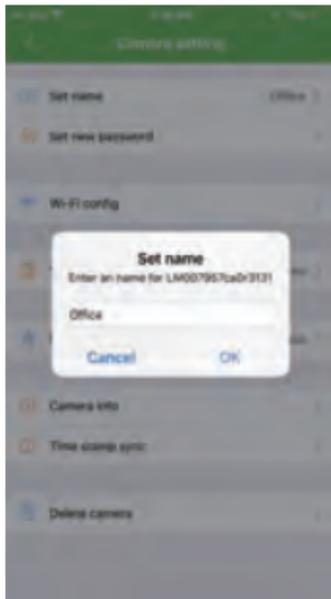

LIVE STREAM VIEW




Camera UID / Name

Camera status


Recorded videos in memory card

Camera setting

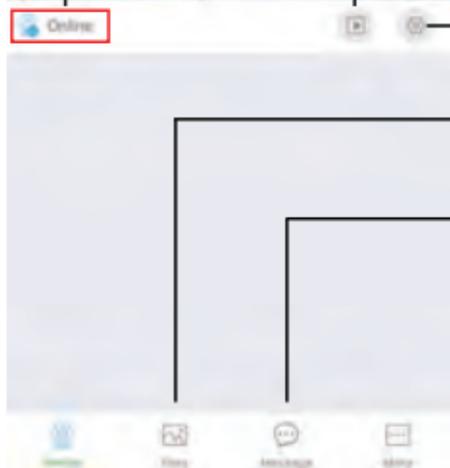


Files: Snapshots and Recorded videos

Message: Alarm messages
(Please insert micro sd card to get alarm pictures)

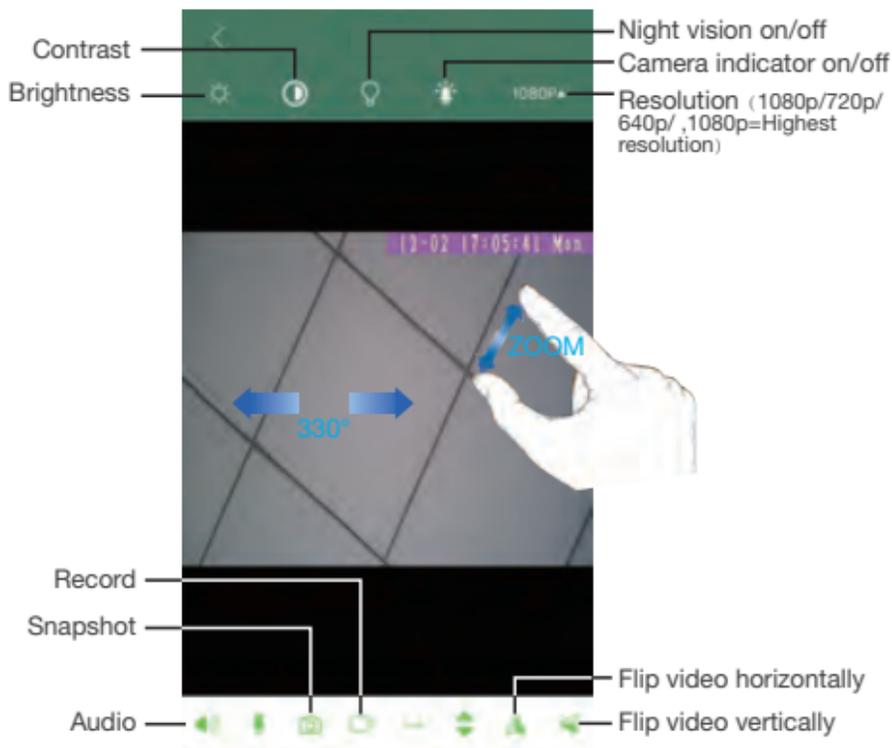

Slide your finger left and right to rotate the camera Pinch and expand to zoom in and out.

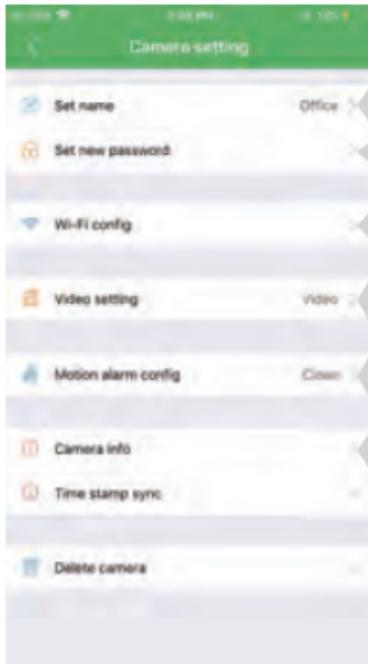

Set name: Set camera name like, Office. Living room. Kids room...

Set new password: Set camera new password

Wi-Fi config: Set camera to other Wi-Fi

Video setting: Set SD card record mode / Resolution /File length ...

Motion alarm config: Set motion detection sensitivity



Camera info: Camera ip address, Mac address, Reboot...

Note: you must scroll down and press ok to save the settings.

LAMP LIGHT

From the Pro iCam home screen go to your camera's settings by clicking on the settings icon  or if not visible, touch and hold on the camera listed.

On the popup window with additional options, select Lamp, and on the next screen you can adjust the color and brightness of the lamp.

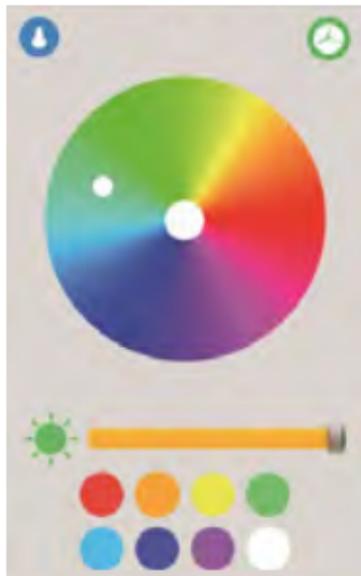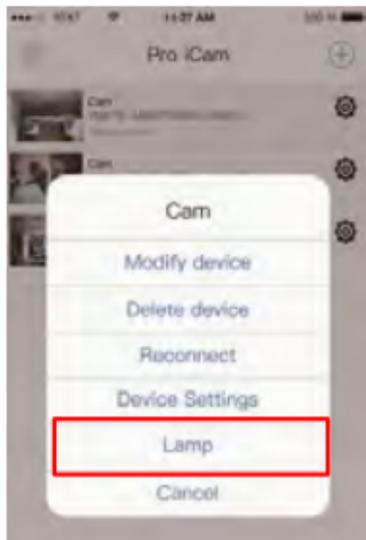

TROUBLESHOOTING

Most issues can be solved by formatting the memory card, restarting the LUNA, or resetting the LUNA's WiFi.

Formatting the memory:

WARNING: formatting the memory will wipe out all the recorded media previously stored.

Formatting the memory will clean up any file corruption that may exist preventing the device from operating correctly.

Restart the LUNA

Restart the app, disconnect the power from the LUNA, turn off the WiFi ❶ for about 30 seconds, reconnect the power and finally turn on the WiFi ❶

Reset the LUNA's WiFi:

While the Wifi power is on, press and hold the hidden pinhole ❶ switch ❷ for about 10 seconds.

Specification

Item	Wi-Fi Security Camera
Lens	2.0 Mega COMS
Resolution	1920*1080
Frames	Max 25fps
Compressed format	H.264
View Angel	Rotatable 330 degree
Night Vision	Invisible 3M
Type of Memory Card	TF>=Class 4/10 HC Marked
Capacity of Memory Card	Max 128GB
PC operation system	Windows 7,8/Mac OS X
Mobile Phone operation system	Android/iOS
Video Player	VLC Player/SM Player
Battery Capacity	Rechargeable 5000mA
Recording	1min/20mb
Working time	8-10 hours
Charging time	10-12 hours
Power adapter	5V/2A

Scan QR code to download
PDF version of this manual

