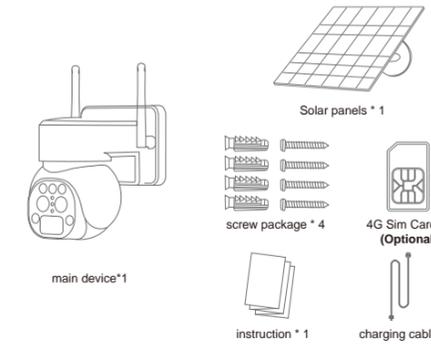# Quick Start Guide

Soliur-SX3D-Pro

The user guide is for reference only.
Screen shots displayed in this user's guide
of the"UBOX"app may appear differently
than those currently featured in your app
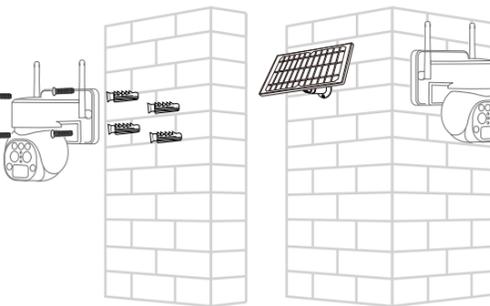as frequent updates and improvements.

You need to know before getting started

1. Please fully charge the battery for new cameras, it usually takes one night to charge the battery.

2. For devices with solar power, try to install the solar panel in a location with sufficient sunlight to increase the battery life.

3. Please use the SIM card that comes with your camera. The SIM card is tested for bandwidth and traffic, other channels cannot guarantee normal internet access. Avoid topping up after the traffic has been used up.

4. If you do not top up your SIM card for 3 months and it is in arrears, the operator will automatically cancel the card number.

5. When installing the device, you can use a mobile phone from the same operator to check the 4G signal at the installation location. it will ensure long-lasting of the battery life
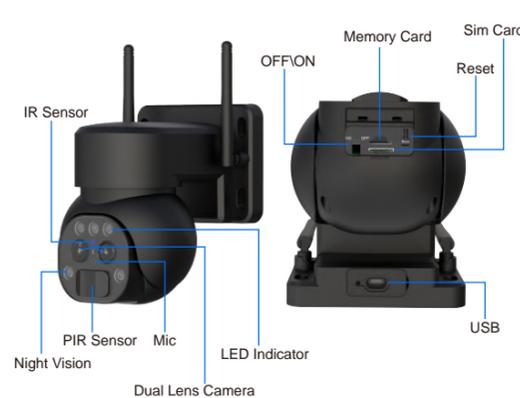
1.Package Content

Solar panels * 1

main device*1

screw package * 4   4G Sim Card * 1 (Optional)

instruction * 1   charging cable * 1

2.Camera Installation

3.Product introduction

OFF/ON   Memory Card   Sim Card
                          Reset

IR Sensor

PIR Sensor   Mic
Night Vision   LED Indicator   USB
Dual Lens Camera

4.APP INSTALLATION

(1.)Scan the following QR code or search for 'UBox' from the App Store(for ios devices) or Google Play Store (for Android smartphones) to download and install the app.

5.APP REGISTRATION

(1.) Open the app, then input your E-mail address, then press 'Register'. Check and select to agree the agreement, then your E-mail box will get an verification mail. (For better user's experience, please allow to open all permissions to avoid missing any notifications from the app.)

(2.) Set the login password and confirm the login password. Then press 'Register' to next step. (For your password safety, the password requires more than 8 characters plus combination of letters)

(3.)We send a verify mail to you, go to your mail box click the link to complete the verification.

(3.)Enter your E-mail address, and password, click login. (APP will auto fill the account intomaion)

6.4G LED Light State introduction:

No.	LED Status	Device Status
1	Press and hold the Reset button for 4-5 seconds and then release. the red LED is solid, next the blue LED blink fast and turns to solid	Reset successfully
2	The solid blue LED	Waiting for 4G setup
3	The blue LED is blinking fast	4G connection successfully
4	The red LED is on and turns to solid blue	Live view
5	The red LED is blinking slowly	The issue is the communication of 4G module and main chipset
6	The red and blue LED blink fast alternatively	SIM card is not recognized, please change new SIM card
7	The red and blue LED blink slowly alternatively	The data of SIM card runs our or out of service, please top up the data or exchange another SIM card with enough data

7.4G CONNECTION

(1.)Press 'Add Family' then set the room or position as per reminders.

(2.)Enter your family name and then press 'Next'.

(3.)Input the necessary information just like Country,Province, then press 'Done'.

(4.) Press 'Add a device' to add a smart device

(5.) Insert the SIM card into device, then click 'Setup 4G Device'

(6.)After power on the device, wait for about 1 minute the device bule LED light up, Then press Next.

(7.) If the device blue LED not light up, please check before coding notes.

(8.) Find the UID QR code on device, then use APP scan the QR code.

(9.) APP is searching the device in internet it may take 5-60 seconds.

(10.) Select the name and device location then press Done.

(11.) The device will enter to the device list automatically.
Setup success! The device is ready to use.

(12.) Notes about PIR detection
"User can change the PIR detection sensitivity in device settings we recommend to set sensitivity at "Disabled" or "Low" to reduce fasle alert and save the battery power in noisy environments
"Disabled: disabled PIR detection.
"Low: detets 7 seconds PIR detects a moving
"Medium: delays 5 seconds PIR detects a moving
"High: delays 1 second PIR detects a moving.

8.USING THE APP

Enter to select your family or smart device location
Turn on/offhe push notification.
Settings: Sharing,Cloud storage,Delete the device.
Press to enter the preview section.
Press to add a smart device

Check "my account" name and change password;
Check and purchase the Cloud storage;
Check and purchase the AI Cloud Facial Recognition;
Check and add my friends list and permission;
Set the default voice and resolution for the devices;
Check the App version.

Click the"Calendar" icon on the right top corner , then choose the date to playback the videos from cloud storage.

Choose the desired date to check all videos from cloud storage.

Account and value-added account management

Smart device basic settings
Could set "Storage management,Flip screen, Environmental model,PIR detection,Sleep time, Power frequency,LED indicator,Device name"
Could check the information of "Device name, Device ID,Model,FW version,Manufacturer, Check for the FW updates.."
Turn on/off the speaker
Screenshot
Playback switch 'Micro SD memory" and 'Cloud storage
Take a video for the live view
Microphone - Speak to the smart device side.

9.SPECIAL NOTES!

(1.) The device is equipped with a rechargeable lithium battery.The battery life will be affected by the device wake-up time and the number of wake-ups.Therefore,the PIR sensor alarm detection function is used in an environment with a lot of people.It is recommended to turn off or set the device to low sensitivity to reduce device wake-up and call times extend battery life.When the battery is low,please charge the battery immediately.

(2.) It is a delicated device with low power consumption design. Everytime the device is awakened and will work for few seconds.After that,the device will enter standby mode to save power. You can set the work time in the app settings.

(3.) because the mainland China does not receive Google's system push messages,you need to open the app's self-starting function in your phone to receive push messages.

(4.)This device provides one month of free cloud storage and face recognition services. If you need to continue using value-added services after the trial period expires, you need to purchase them in the app.